



# JS 540~560W 144M10

## MONO 10BB HALF-CUT MODULE

▲ **1.6°C**

It's temperature is 1.6°C lower than that of the conventional module

▲ **4%**

4% more energy generation



### ▲ Half-Cut technique leads to increased power output

When the cells are cut into halves, the current are also halved, which enables less internal loss. Series-parallel wiring improves power performance. The working temperature of module and junction box are lower than that of conventional types, which effectively reduces the hot spot risk and reduces overall module damage.



### ▲ Reduced encapsulation loss due to reduced current

HC module is of lower current and lower CTM loss at around 0.2%, while the CTM loss of conventional module is 1%.



### ▲ Series-parallel wiring mode results in reduced shading loss

Series-parallel wiring will not only reduce power lows from shade but also improves the effective use of supports and space.




### ▲ Excellent temperature performance

The temperature of HC module is 1.6 °C lower than that of the conventional module under the same working condition, which results less power loss.

## LINEAR PERFORMANCE WARRANTY

2-25 years decay < 0.55% annually on average

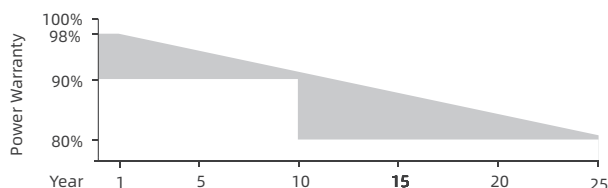

## CERTIFICATES

\*Certification requirements vary in different markets, please consult with JShine Solar Optronics sales team for appropriate certification.

**1500v**

### ▲ 1500V high system voltage design

ISO 9001: 2015  
Quality Management System

ISO 14001: 2015  
Environmental Management System

IEC 61215 / IEC 61730

OHSAS 18001: 2007  
Occupational Health & Safety Management System



# JS 540~560W 144M10



## ELECTRICAL PARAMETERS @ STC

Max. Power Output Pmax (W)	540	545	550	555	560
Power Tolerance	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%
Max. Power Voltage Vmp (V)	41.96	42.06	42.16	42.24	42.33
Max. Power Current Imp (A)	12.87	12.96	13.05	13.14	13.23
Open Circuit Voltage Voc (V)	49.60	49.70	49.80	49.90	50.00
Short Circuit Current Isc (A)	13.74	13.84	13.94	14.04	14.14
Module Efficiency (%)	20.90	21.10	21.30	21.49	21.68

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass 1.5  
\*Measurement Tolerance (±3.0%)

## ELECTRICAL PARAMETERS @ NOCT

Max. Power Output Pmax (W)	402	406	410	413	416
Max. Power Voltage Vmp (V)	38.29	38.35	38.43	38.52	38.59
Max. Power Current Imp (A)	10.50	10.58	10.66	10.73	10.80
Open Circuit Voltage Voc (V)	46.12	46.21	46.31	46.40	46.49
Short Circuit Current Isc (A)	11.10	11.18	11.26	11.34	11.42

\*NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

## TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.36%/°C
Temperature Coefficients of Voc	-0.29%/°C
Temperature Coefficients of Isc	+0.048%/°C

## MECHANICAL PARAMETERS

Cell Type	Mono 182x91mm
Number of Cells	144pcs(6x24)
Dimensions (L*W*H)	2278x1134x35mm
Weight	28.6kg
Frame	Anodised Aluminum
Junction Box	IP67, 3 bypass diodes
Cable, Length	4.0mm <sup>2</sup> , 300mm

## OPERATING CONDITION


Maximum System Voltage(V)	1000(DC)	1500(DC)
Operating Temperature(°C)	-40~+85	
Max. Wind Load / Snow Load(pa)	2400/5400	
Max. Over Current(A)	20	
Fire Rating	Class A	
NOCT(°C)	45±2	

## PACKAGE INFORMATION

Container 40'HQ	620pcs
Quantity / Pallet	CTNR: 31pcs

www.jshine-solar.com  
info@jshine-solar.com

## ASSEMBLY DRAWING (Unit:mm)

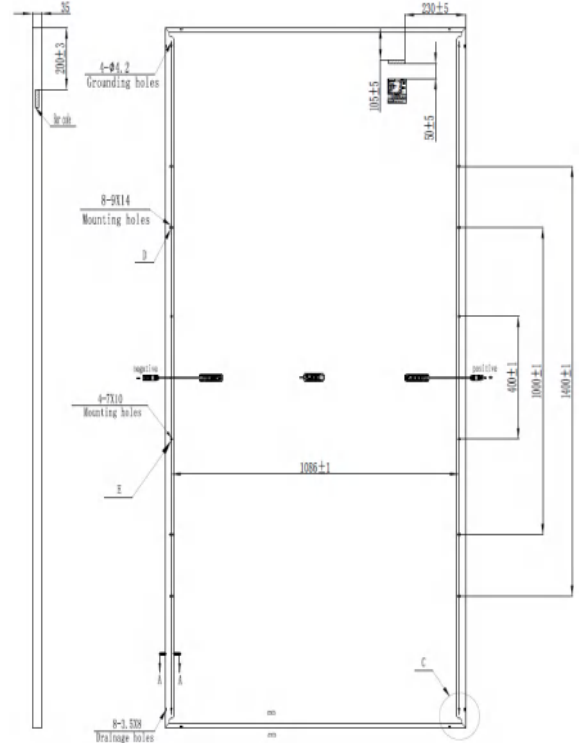

## I-V Curves

